


DIMENSIONS

MILLIMETERS(INCHES)


Filler Breather Filters

Ordering Code

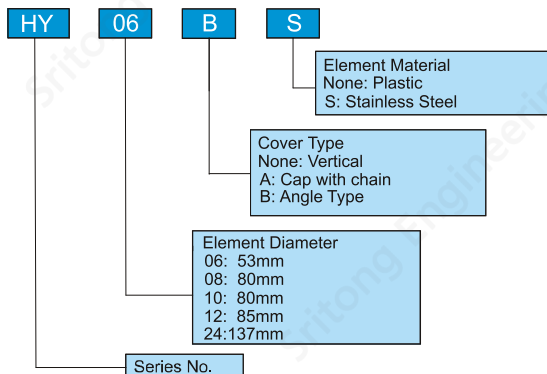


Finished in nickel chrome
High filtration efficiency
Dirt holding capacity
Standard holes mounting on 3,4 and 6

HY-08



HY-08-A

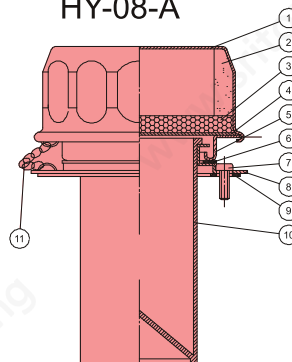


HY-08A		
No.	Description	Q'ty
1	Filter Cap	1
2	Element	1
3	Polyurethane foam	1
4	Element Plate	1
5	Mounting Kit	1
6	Base Plate	1
7	Fix Screw	6
8	Mounting Face	1
9	Gasket	1
10	Oil Strainer	1
11	Chain	1



HY-10



HY-12B



HY-24

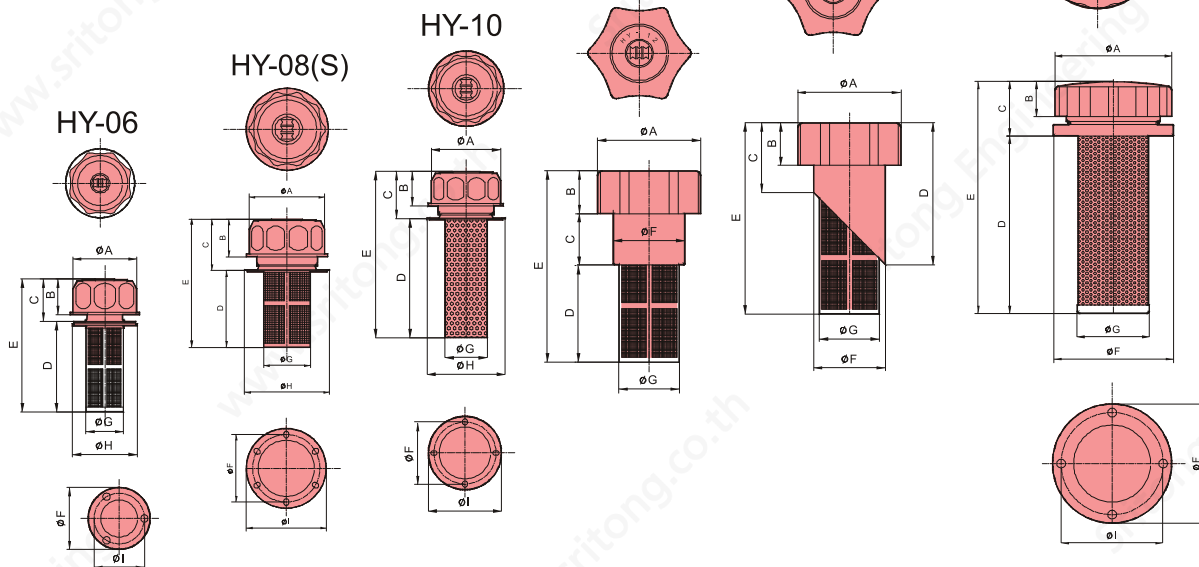

Ratings

Series	ϕA mm (in)	B mm (in)	C mm (in)	D mm (in)	E mm (in)	ϕF mm (in)	ϕG mm (in)	ϕH mm (in)	ϕI mm (in)	Filtration Micron		Material of Filter	Flow Rate		Type of Fixing F P.C.D	Weight kg (lb)
										air	oil		air m ³ /min	oil lpm		
HY-06	53 (2.08)	29 (1.14)	34 (1.33)	74 (2.91)	108 (4.25)	42 (1.65)	31 (1.22)	51 (2.00)	51 (2.00)	40	400	SUS304	0.1	52	$\phi 42(1.65)$ 3HoleX3/16"(5m/m)	.1 (.22)
HY-08	80 (3.14)	39 (1.53)	52 (2.04)	83 (3.26)	135 (5.31)	71 (2.79)	49 (1.92)	89 (3.50)	85 (3.34)	40	400	Plastic PE	0.4	100	$\phi 71(2.79)$ 6HoleX3/16"(5m/m)	.24 (.53)
HY-08S	80 (3.14)	39 (1.53)	52 (2.04)	83 (3.26)	135 (5.31)	71 (2.79)	48 (1.88)	89 (3.50)	85 (3.34)	40	400	SUS304	0.4	100	$\phi 71(2.79)$ 6HoleX3/16"(5m/m)	.24 (.53)
HY-10	80 (3.14)	39 (1.53)	50 (1.96)	139 (5.47)	189 (7.44)	78 (3.07)	48 (1.88)	89 (3.50)	88 (3.46)	40	500	SECC	0.4	170	$\phi 78(3.07)$ 4HoleX3/16"(5m/m)	.36 (.79)
HY-12	85 (3.34)	35 (1.37)	42 (1.65)	80 (3.14)	157 (6.18)	60 (2.36)	48 (1.88)	-	-	40	400	SUS304	0.4	100	Welding	.46 (1.02)
HY-12B(45°)	85 (3.34)	35 (1.37)	57 (2.24)	116 (4.56)	138 (5.43)	60 (2.36)	48 (1.88)	-	-	40	400	SUS304	0.4	100		.55 (1.22)
HY-24	137 (5.39)	35 (1.37)	60 (2.36)	209 (8.22)	269 (10.5)	120 (4.72)	85 (3.34)	141 (5.55)	140 (5.51)	40	500	SECC	0.9	400	$\phi 120(4.72)$ 4HoleX3/16"(5m/m)	1.34 (2.97)