

DIMENSIONS

MILLIMETERS(INCHES)

Fluid Level and Thermometer (Temperature) Gauges

Tanking side mounting

Visual level indicator with or without thermometer

3 standard size 3", 4" and 5". Simple to install

High impact, high visibility, easy to read

Compatible with mineral and petroleum based fluid

Ordering Code


LS

3"


Pitch of Mounting Bolts
 3: 3"
 4: 4"
 5: 5"
 200: 200mm
 300: 300mm
 400: 400mm
 500: 500mm

LS: Chrome-Plated Steel Case
 BS: Polystyrene Case
 TS: Aluminium Case
 LG: Transparent Acrylic Body


LS-3"





BS-3"



TS-3"



LG-4"

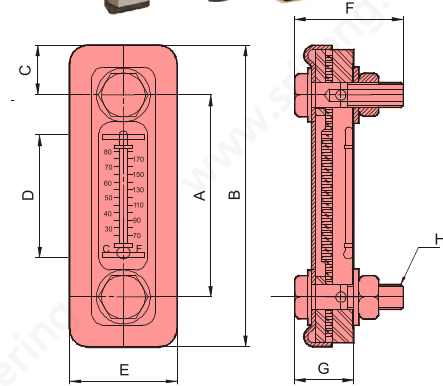

Ratings

Series	A mm (in)	B mm (in)	C mm (in)	D mm (in)	E mm (in)	F mm (in)	G mm (in)	H mm (in)	Weight kg(lb)
LS-3"	79 (3.11)	118 (4.64)	20 (.78)	58 (2.28)	42 (1.65)	41 (1.61)	18 (.70)	M10 X P1.5	.19 (.42)
LS-5"	127 (5.00)	182 (7.16)	28 (1.10)	95 (3.74)	51 (2.00)	45 (1.77)	20 (.78)	M12 X P1.75	.33 (.73)
BS-3"	76.2 (3.00)	104 (4.09)	14 (.55)	40 (1.57)	36 (1.41)	38 (1.49)	20 (.78)	M10 X P1.5	.10 (.22)
BS-5"	127 (5.00)	155 (6.10)	14 (.55)	92 (3.62)	36 (1.41)	38 (1.49)	20 (.78)	M10 X P1.5	.14 (.31)
TS-3"	76.2 (3.00)	101 (3.97)	13 (.51)	42 (1.65)	36 (1.41)	38 (1.49)	19 (.74)	M10 X P1.5	.09 (.19)
TS-5"	127 (5.00)	151 (5.94)	13 (.51)	91 (3.58)	36 (1.41)	38 (1.49)	19 (.74)	M10 X P1.5	.12 (.26)
LG-3"	75 (2.95)	106 (4.17)	15 (.59)	55 (2.16)	25 (.98)	46 (1.81)	13 (.51)	M10 X P1.5	.12 (.26)
LG-4"	100 (3.93)	130 (5.11)	15 (.59)	80 (3.14)	25 (.98)	46 (1.81)	13 (.51)	M10 X P1.5	.13 (.28)
LG-5"	127 (5.00)	156 (6.14)	15 (.59)	107 (4.21)	25 (.98)	46 (1.81)	13 (.51)	M10 X P1.5	.14 (.31)
LG-200	200 (7.87)	230 (9.05)	15 (.59)	175 (6.88)	28 (1.10)	58 (2.28)	25 (.98)	M12 X P1.75	.31 (.68)
LG-300	300 (11.8)	330 (12.9)	15 (.59)	275 (10.8)	28 (1.10)	58 (2.28)	25 (.98)	M12 X P1.75	.39 (.86)
LG-400	400 (15.7)	430 (16.9)	15 (.59)	375 (14.7)	28 (1.10)	68 (2.67)	25 (.98)	M12 X P1.75	.46 (1.02)
LG-500	500 (19.6)	530 (20.8)	15 (.59)	475 (18.7)	28 (1.10)	68 (2.67)	25 (.98)	M12 X P1.75	.55 (1.22)