


MECHANICAL VALVES

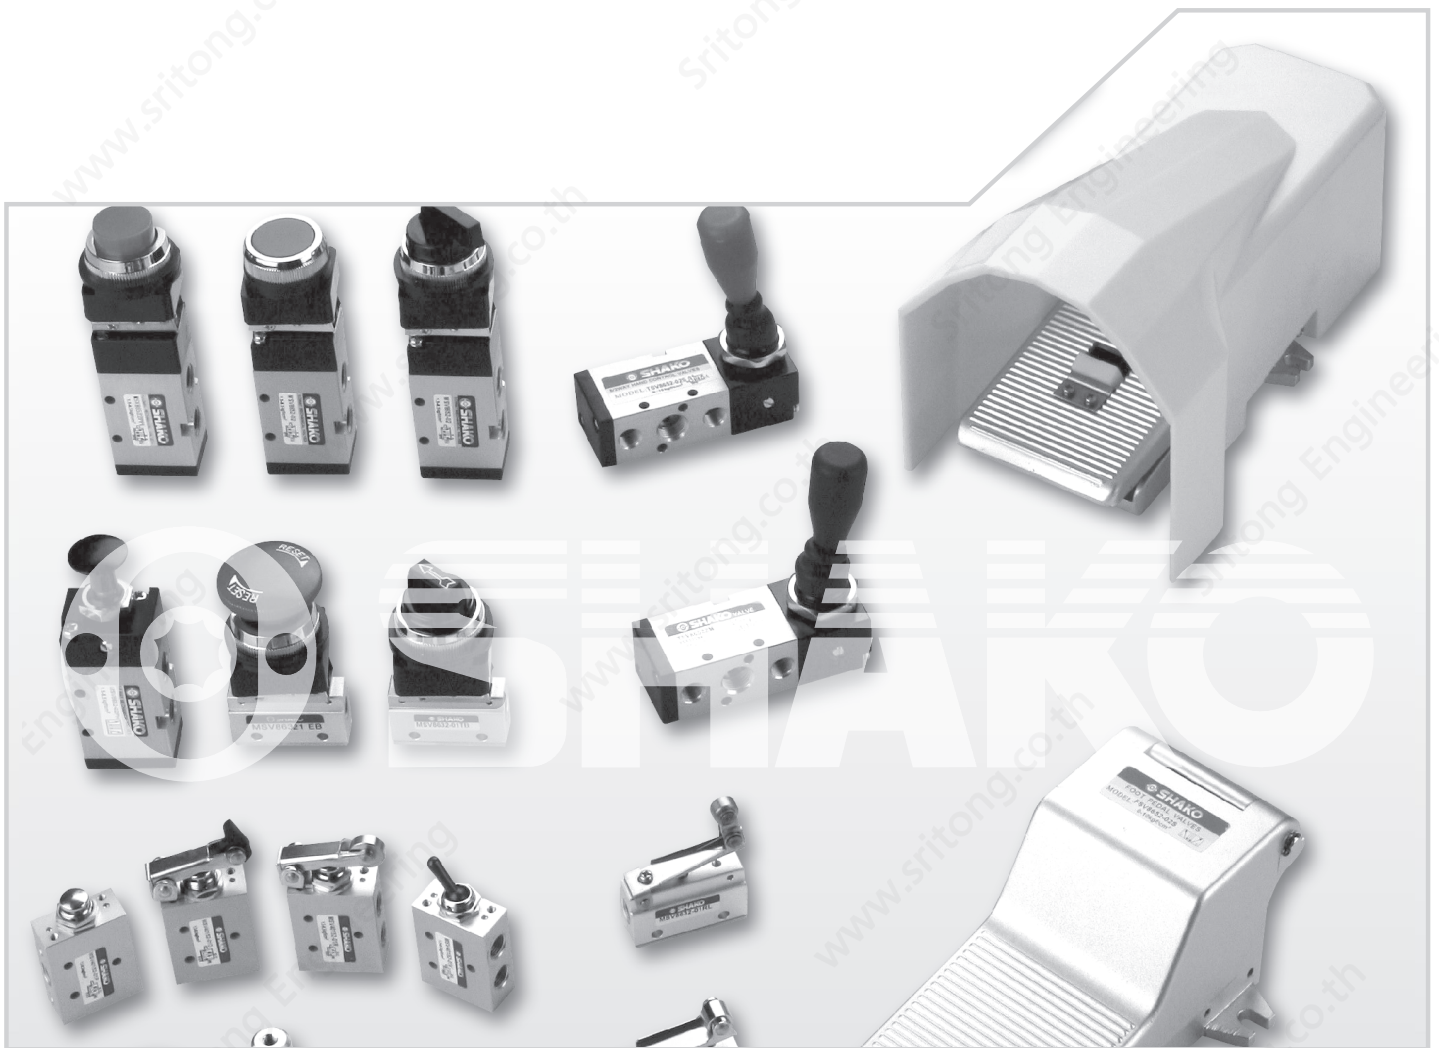


Features

- * Simply operating.
- * Suitable for vacuum operation.
- * Available for panel mounting.
- * Mounting bracket as optional accessory.
- * TSV8652R-01/02 for manifold assembly.

Symbol

• TSV8652 M



• TSV8652 S



TSV8652R-02M

TSV8652-03M

TSV8652-02M

How to order

TSV8652

R

-

02

N

M

F


Hand control valves		Manifold		Port size		Thread		Acting		Mounting bracket	
52	5/2 way	Blank	Standard	01	1/8"	Blank	PS	S	Spring return	Blank	W/O bracket
		R	Manifold type	02	1/4"	N	NPT	M	Detent	F	W/I mounting bracket
				03	3/8"						For 1/8", 1/4" only.

Specifications


Model	TSV8652(R)-01M(S)	TSV8652(R)-02M(S)	TSV8652-03M(S)
Port size	1/8"	1/4"	3/8"
Body material	Aluminum alloy		
Fluid	Compressed air		
Sectional area	18mm ²	18mm ²	35mm ²
Operating pressure range	0 ~ 9 kgf/cm ²		
Max. operating pressure	10 kgf/cm ²		
Ambient temperature	-10°C ~ 60°C		
R type	For 1/8", 1/4" port only		

Flow chart

Model: TSV8652-01, 02M(S)


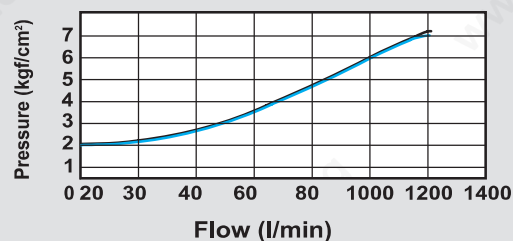


Model: TSV8652-03M(S)


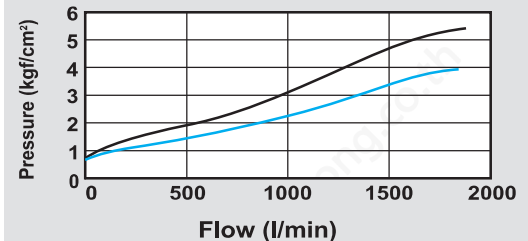


Dimensions



TSV8652-01, 02M(S)

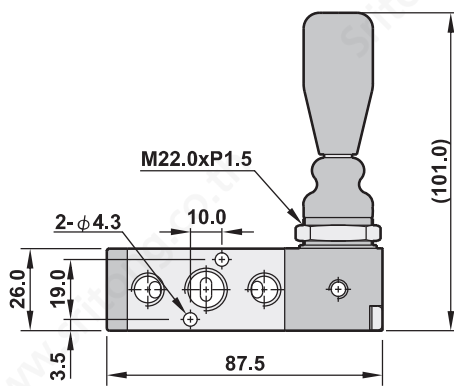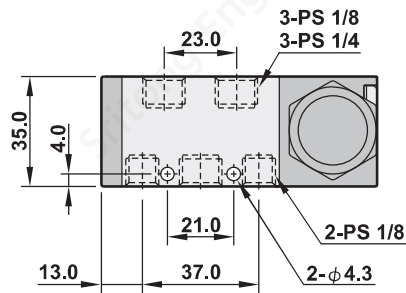

TSV8652-03M(S)

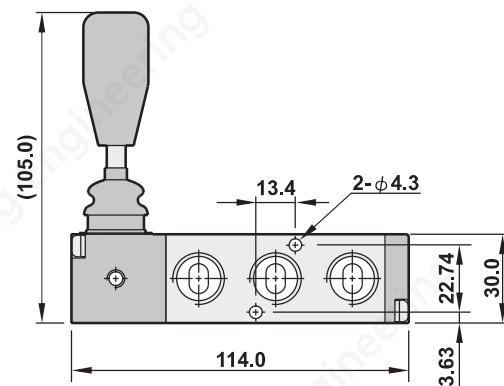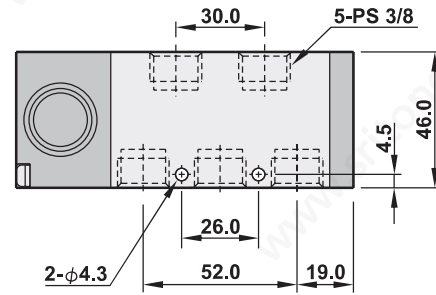

TSV8652R-01, 02

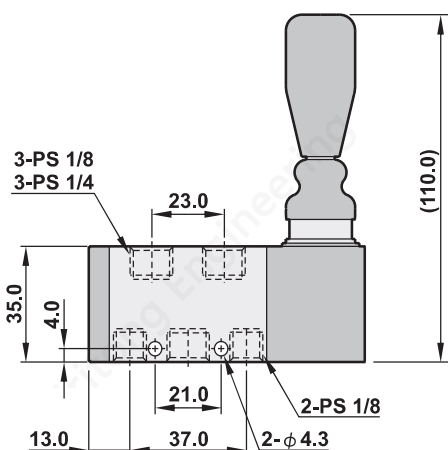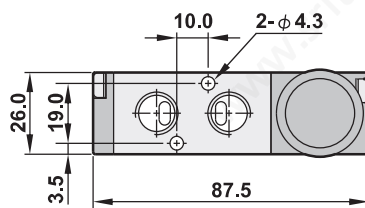

TSV8652-01, 02MF

